

Compact instantaneous combination encased boilers – outdoor installation


Vela Compact IN (bi-thermal heat exchanger)



VELA COMPACT CTFS 24 AF IN

Wall-hung gas-fired combination boiler with instantaneous production of domestic hot water for encased, outdoor installation:

- sealed chamber and forced draught (CTFS)
- Pre-set to run on natural gas or LPG.
- Production of hot water for CH and domestic hot water;
- Front panel closure with key.
- 5-pipe, copper, bi-thermal, high-efficiency heat exchanger.
- Integrated safety board with burner electronic ignition and flame sensing via single electrode.
- Diagnostics of operation and faults.
- Standard remote control.
- Control panel also in the boiler with pressure gauge and CH and DHW temperature regulation.
- Anti-fast, anti-frost, pump protection, pump post-circulation.
- Pump assembly includes water pressure switch, 3-bar safety valve, system loading assembly with loading and unloading taps.
- 92/42/CEE efficiency class: ★★★

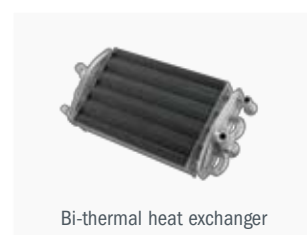


Technical specifications

Model		Code	Output in kW	Efficiency at max output	Gross weight
VELA COMPACT CTFS 24 AF IN	NAT. GAS	CVMxx2CA24	23.7	93 %	Kg. 28.8
	LPG	CVMxx3CA24			
FRAMEWORK		OTELAINC02	ACCESSORY SOLD SEPARATELY		Kg. 12.2

STANDARD ADDITIONAL EQUIPMENT (included in the price): standard hydraulic kit, paper template, flue gas discharge diaphragm, remote control and thermo-moulded casing. The upper panel, included in the standard delivery, is supplied in a separate package.

Dimensions of frame and coupling centre distances

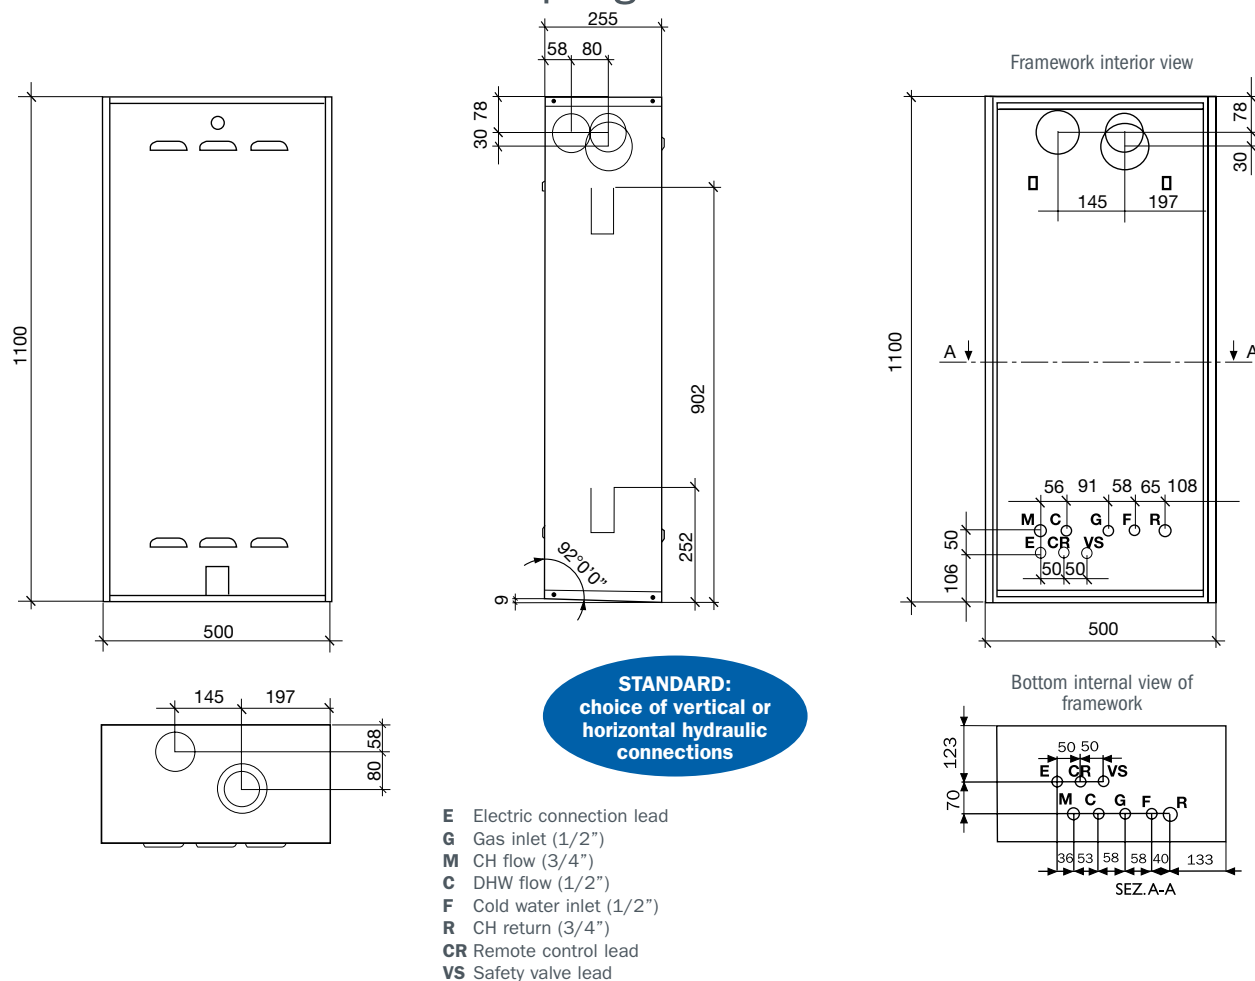

Accessories

Item	Description	Code
	"Standard" split pipe kit	0SDOPPIA07
	"Plus" split pipes kit (pipes 0.5 m long)	0SDOPPIA08
	"Plus" hydraulic kit (copper pipes, 90° taps and bi-cones)	OKITIDBA07
	Hydraulic kit (complete with taps) for vertical installation	OKITISTI02
	Anti-frost kit	OKANTIGE00

Please see pages 70 - 71 - 72 - 73 for complete accessory list